

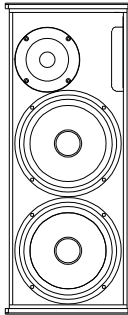


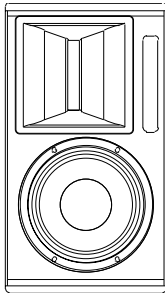


## product line-up spring 2007

T-series	features
TS3	 <ul style="list-style-type: none"><li>● 1" soft-dome tweeter + 6.5" woofer</li><li>● 67Hz. – 20.000Hz. (+/- 3dB)</li><li>● SPL program/peak 109dB / 115dB</li><li>● Signal Integrity Sensing™ pre-wired</li><li>● Dispersion H 90° x V 60°</li><li>● Omnimount™ mounting points, bracket (option)</li></ul>
TS7	 <ul style="list-style-type: none"><li>● 1" soft-dome tweeter + double 6.5" woofer</li><li>● 66Hz. – 20.000Hz. (+/- 3dB)</li><li>● SPL program/peak 115dB / 121dB</li><li>● Signal Integrity Sensing™ pre-wired</li><li>● Dispersion H 90° x V 40°</li><li>● Omnimount™ mounting points, bracket (option)</li></ul>
V-series	features
VR8	 <ul style="list-style-type: none"><li>● RBN401 pro-ribbon HF driver with 8" woofer</li><li>● All Neodymium drivers</li><li>● 74Hz. – 20.000Hz. (+/- 3dB)</li><li>● SPL program/peak (nom.) 120dB / 125dB</li><li>● Signal Integrity Sensing™ pre-wired</li><li>● Revolvable 90°x40°/40°x90° HempHorn™ wave-guide</li><li>● Asymmetric enclosure for multi-angle mounting</li><li>● Durotect™ scratch-resistant coating</li></ul>

## V-series continued

## features


VR12  
VR12i  
VR12M



- RBN601 pro-ribbon HF driver with 12" woofer
- 60Hz. – 20.000Hz. (+/- 3dB)
- SPL program/peak (nom.) 127dB / 132dB
- Signal Integrity Sensing™ pre-wired
- Revolvable 90°x40°/40°x90° HempHorn™ wave-guide
- Asymmetric enclosure for multi-angle mounting
- Durotect™ scratch-resistant coating
- All NeoDymium drivers

*VR12i without handles and stand mount adapter  
VR12M with "mirrored" baffle, for floor monitor use*

VR12/60  
VR12/60i  
VR12/60M




- RBN601 pro-ribbon HF driver with 12" woofer
- 60Hz. – 20.000Hz. (+/- 3dB)
- SPL program/peak (nom.) 128dB / 133dB
- Signal Integrity Sensing™ pre-wired
- Non-revolvable 60°x30° HempHorn™ wave-guide
- Asymmetric enclosure for multi-angle mounting
- Durotect™ scratch-resistant coating
- All NeoDymium drivers

*VR12/60i without handles and stand mount adapter  
VR12/60M with "mirrored" baffle, for floor monitor use*

## S-series


## features

SR9




- RBN401 pro-ribbon HF driver with 2x 5" woofers
- 99Hz. – 20.000Hz. (+/-3dB)
- SPL program/peak (nom.) 117dB / 123dB
- Signal Integrity Sensing™ pre-wired
- Dispersion H 120 x V 15
- 16 ohms impedance
- Very compact enclosure for minimal sightline obstruction
- Durotect™ scratch-resistant coating.

## QR18

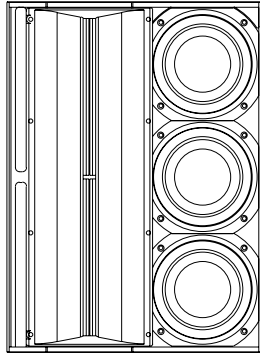


- RBN1801 pro-ribbon HF driver with 3 x 6.5" woofers
- All NeoDymium drivers
- 74Hz. – 20.000Hz. (+/-3dB)
- SPL program/peak (nom.) 123dB / 144dB
- Signal Integrity Sensing™ pre-wired
- 90°x3° HempHorn™ wave-guide
- Column length 50,4 cm / 19.8 in.
- Durotect™ scratch-resistant coating

## QM18




- 3x 6.5" woofers
- 74Hz. – 1.000Hz. (+/-3dB)
- SPL program/peak (nom.) 123dB / 129dB
- Signal Integrity Sensing™ pre-wired
- Column length 50.4cm/19,8in.
- LMF "fill" module for QR-arrays
- Durotect™ scratch-resistant coating

## QR36

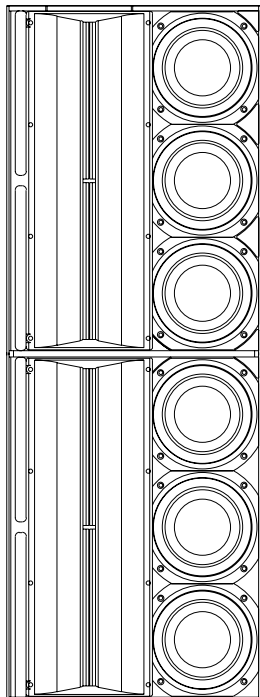


- Double RBN1801 pro-ribbon HF drivers with 6 x 6.5" woofers
- All NeoDymium drivers
- 74Hz. – 20.000Hz. (+/-3dB)
- SPL program/peak (nom.) 129dB / 150dB
- Signal Integrity Sensing™ pre-wired
- 90°x3° HempHorn™ wave-guide
- Column length 99,2 cm / 39.1 in.
- Durotect™ scratch-resistant coating

## QM36

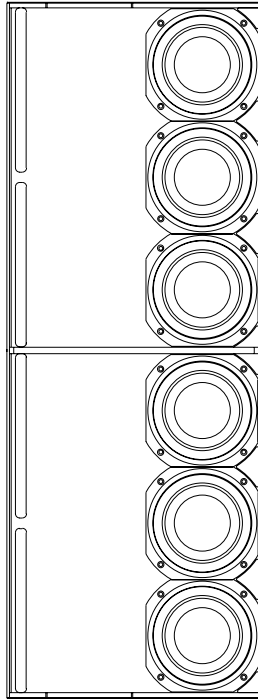


- 6x 6.5" woofers
- 74Hz. – 1.000Hz. (+/-3dB)
- SPL program/peak (nom.) 129dB / 135dB
- Signal Integrity Sensing™ pre-wired
- Column length 99.2cm/39,1in.
- LMF "fill" module for QR-arrays
- Durotect™ scratch-resistant coating

## QB363

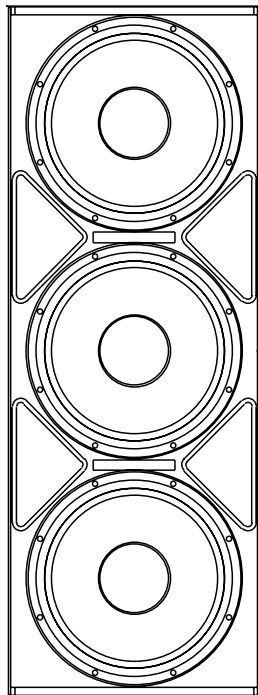


- 3x 12" vented all Neodymium woofers
- 45Hz. – 250Hz. (+/-3dB)
- SPL program/peak (nom.) 130dB / 135dB
- Signal Integrity Sensing™ pre-wired
- Column length 99.2cm/39,1in.
- LMF bass module for QR-arrays
- Durotect™ scratch-resistant coating

LR14

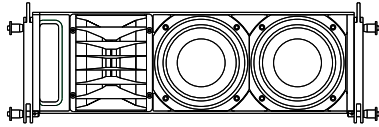


- RBN401 pro-ribbon HF driver with double 6.5" woofers
- All Neodymium drivers
- 74Hz. – 20.000Hz. (+/-3dB)
- SPL program/peak (nom.) 126dB / 130dB (HF)
- Signal Integrity Sensing™ pre-wired
- "Morpher" lens in 120°x15° HempHorn™ wave-guide
- Durotect™ scratch-resistant coating

LR14B




- Bass system stackable and flyable with LR14 or in separate arrays
- Double-tuned band-pass design with high efficiency
- Neodymium 12" drivers for excellent performance-to-weight ratio
- 46Hz. – 200Hz (+/- 3dB)
- SPL program/peak (nom.) 129dB / 134dB
- Signal Integrity Sensing™ pre-wired
- Durotect™ scratch-resistant coating

LR16

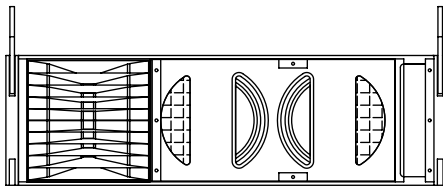


- RBN601 pro-ribbon HF with double 8" tapered woofers
- 70Hz. – 20.000Hz. (+/-3dB)
- SPL program/peak (nom.) 123dB / 135dB (HF)
- Signal Integrity Sensing™ pre-wired
- "Morpher" lens in 90°x10° HempHorn™ wave-guide
- Durotect™ scratch-resistant coating

LR16B

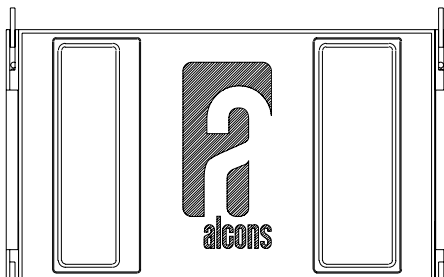

- Bass system stackable and flyable with LR16 or in separate arrays
- Double-tuned band-pass design with high efficiency
- Neodymium 15" drivers for excellent performance-to-weight ratio
- 46Hz. – 200Hz (+/- 3dB)
- SPL program/peak (nom.) 132dB / 137dB
- Signal Integrity Sensing™ pre-wired
- Durotect™ scratch-resistant coating


BF151  
BF151i



- Single 15" woofer (4 ohms)
- 42Hz - 300Hz (+/- 3dB)
- SPL program/peak (nom.) 127dB / 135dB
- Signal Integrity Sensing™ pre-wired
- Stand mount
- Double baffle board w. flush mount transducers
- Durotect™ scratch-resistant coating

*BF151i without handles, castor wheels, cover and stand mount*


BF181  
BF181i



- Single 18" woofer (4 ohms)
- 33Hz - 200Hz (+/- 3dB)
- SPL program/peak (nom.) 128dB / 136dB
- Signal Integrity Sensing™ pre-wired
- Stand mount
- Double baffle board w. flush mount transducers
- Durotect™ scratch-resistant coating

*BF181i without handles, castor wheels, cover and stand mount*


BF302  
BF302i

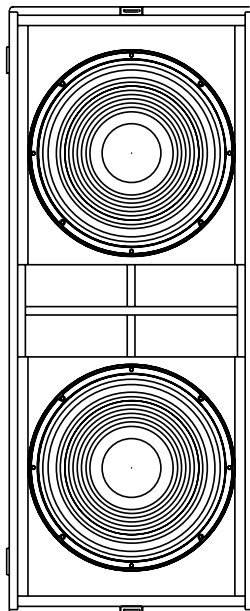

- Double 15" woofer
- 36Hz. - 150Hz. (+/- 3dB)
- SPL program/peak (nom.) 133dB / 141dB
- Signal Integrity Sensing™ pre-wired
- Large, centrally placed vent
- Double baffle board w. flush mount transducers
- Durotect™ scratch-resistant coating

*BF302i without handles, castor wheels and cover*


BF362  
BF362i

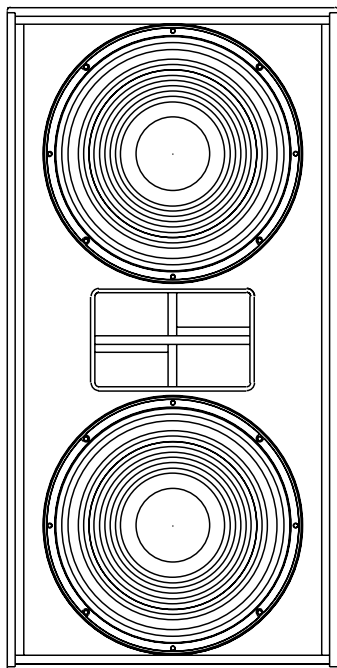

- Double 18" woofer
- 33 – 150Hz. (+/-3dB)
- SPL program/peak (nom.) 134 / 141dB
- Signal Integrity Sensing pre-wired
- Large, centrally placed vent
- Double baffle board w. flush mount transducers
- Durotect™ scratch-resistant coating

*BF362i without handles, castor wheels and cover*


ALC2  
ALC2-ST



- 2 x 1.440W @ 2 ohms peak, Class G
- SDP Speaker Drive Processor™
- SIS Signal Integrity Sensing™, damping > 10.000
- ATCM Advanced Thermal and Clip Management™
- Data port for remote control network

*ST version with stealth-hidden volume controls*


ALC4  
ALC4-ST



- 2 x 2.760W @ 2 ohms peak, Class G
- Dual power supply
- SDP Speaker Drive Processor™
- SIS Signal Integrity Sensing™, damping > 10.000
- ATCM Advanced Thermal and Clip Management™
- Data port for remote control network

*ST version with stealth-hidden volume controls*


ALC6  
ALC6-ST



- 2 x 3.000W @ 4 ohms peak, Class G
- Dual power supply
- Optimized for "4 ohms and up" operation
- SDP Speaker Drive Processor™
- SIS Signal Integrity Sensing™, damping > 10.000
- ATCM Advanced Thermal and Clip Management™
- Data port for remote control network

*ST version with stealth-hidden volume controls*

DDP



- ADC 24bit 96 kHz (27bit when stacked), DAC 24bit 96 kHz
- Freq response 10Hz..45kHz @-3 dB
- Display blue/white 128x64 dots
- Delay function: 1 to 294ms (100 meter) per channel
- User eq: Parametric, 4 bands per channel/notch filtering
- Presets for all Alcons system configurations
- Exchangeable with SDP (analog) modules in ALC

A: Alcons Audio B.V.  
De Corantijn 69  
1689 AN Zwaag  
The Netherlands

E: info@alconsaudio.com  
W: www.alconsaudio.com  
T: +31 (0)229 28 30 90  
F: +31 (0)229 28 30 99